

SoundBathe

Code: BTB40W



www.techvision.co.uk


These waterproof transducer speakers can be fitted behind ceilings, walls, cupboard doors, below baths, etc, in wet/humid areas, for a truly INVISIBLE home theatre experience. No unsightly speakers visible anywhere!

Transducer Technical Specification:

- Frequency Response: 20 - 20,000Hz (depends on mounting surface). Typical 400-20KHz
- Impedance: 8 ohm
- Max power: 50W
- Dimensions: 3" diameter, case depth 1", with attachment bracket, depth is 1 1/2"
- Weight: 1.2 lbs per speaker

Amplifier Technical Specification:

- Frequency Range: 20Hz – 20KHz
- Transmission Range: 5m to 10m
- Max Power Output: 2ch*20W at 4 Ohm
- Voltage: 12Volt DC / 4amp
- Dimensions (W*L*H): 188*88*45mm

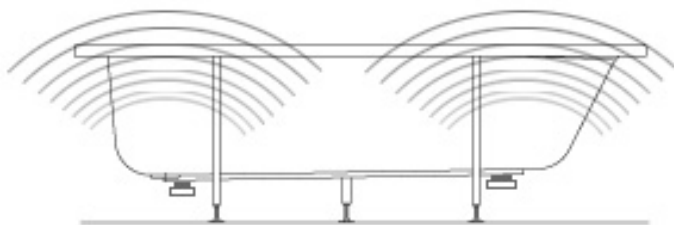

Box Contains:

2 x waterproof transducer speakers, Bluetooth amplifier, cabling required and user manual.